

25 BBL CUTTING BOX

Hot dipped galvanized interior and exterior for an extended service life. 3/8 inch steel sides and lids and 1/2 inch steel plate top and bottom. Bottom and top lift eyes with stacking pads. Hinged and gasketed lid secured with forge flange nuts and swing bolts.

Container constructed to meet DOT/Coast Guard regulation 49 CFR 176.340 for combustible liquids, with 1/2" plate floor and top, 3/8" walls and lids, 2-hinged and gasketed lids secured with forged flange nuts and swing bolts, bottom lift eyes, top lift eyes with stacking pads, pressure relief vent set at 5 PSI. The Tiger 25 BBL Cutting Box is designed for offshore dynamic lifting in accordance with the provisions of API RP 2A and SEPco document OPS0055.

SPECIFICATIONS:

Tare weight 5,360 LBS.

Max gross weight 30,000 LBS.

Safe working load weight 24,640 LBS.

Lid opening: 72" wide x 22" deep

Test pressure: 15 PSI

Design pressure: 10 PSI


Product density 23.4 LBS./GAL.

(specific gravity 2.8)

Aluminum vacuum lids available

Outside dimensions:

84" wide x 96" deep x 52-1/2" high

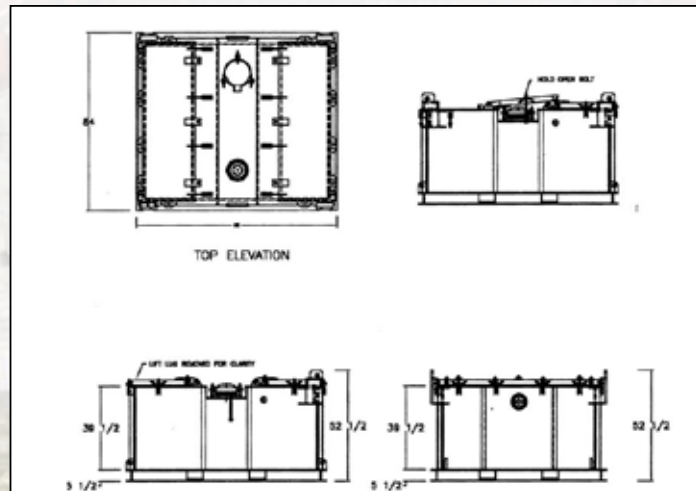

CUTTING BOXES

TIGER OFFSHORE RENTALS



25 BBL CUTTING BOX

STRAPPING CHART

INCHES	BARRELS	GALLONS	INCHES	BARRELS	GALLONS
1	0.67	28	21	14.24	598
2	1.36	57	22	14.93	627
3	2.02	85	23	15.6	655
4	2.71	114	24	16.29	684
5	3.38	142	25	16.95	712
6	4.07	171	26	18.36	741
7	4.74	199	27	18.31	769
8	5.43	228	28	19	798
9	6.1	256	29	19.67	826
10	6.79	285	30	20.36	855
11	7.45	313	31	20.53	883
12	8.14	342	32	21.71	912
13	8.81	370	33	22.38	940
14	9.5	3.99	34	23	966
15	10.71	427	35	22.48	986
16	10.86	456	36	23.95	1006
17	11.52	484	37	24.43	1026
18	12.21	513	38	24.91	1046
19	12.88	541	39	25.38	1066
20	13.57	570			

