

25 BBL IM 101 TRANSPORT TANKS

Meets D.O.T. 3 serial mounted closures requirement. Tank Shell 3/8 inch. SA-36 Plate, GR70, and Tank Mounting of 3/8 inch steel. 3 inch P/V vent, 31 PSI, 20 inch manway, 3 inch male camlock with cap, 3 inch internal valve with shear section. Internal emergency closure with remote trip cable for fast shut off. Steel tubing frame, stackable with top mounted catwalk for safety. Fork lift pockets on both sides and one end.


Tank constructed to meet all applicable requirements of the ASME Boiler & Pressure Vessel Code, Section VIII, Division 1 and CFR 49, Section 270 & 271. Tank Configuration Code T8.

Tank constructed with 3/8", SA-36 plated cylinder, and 3/8" SA-516, GR 70 PL heads. Pressure and vacuum relief vent flow rate of 4208 cubic feet of free air per minute as required by CFR 49, 178.270-11. Set at 25 PSI/6 in Vacuum.

The Tiger 25 BBL IM 101 Transport Tank is designed for offshore dynamic lifting in accordance with the provisions of API RP 2A and SEPco document OPS0055.

SPECIFICATIONS

- * Exterior Coatings, zinc rich epoxy primer, polyurethane top coat
- * Interior Coatings, high-build epoxy lining system
- * Tank test pressure 39 PSI
- * Tank maximum working pressure 25PSI/6 in. Vacuum
- * Tank maximum temperature 200°F
- * Max gross weight 30,000 LBS.
- * Tare weight 5220 LBS.
- * Safe working load weight 24,780 LBS.
- * Tank volume 25 BBL 1052 GAL.
- * Dimensions: 72" x 96", height 84"/Full length walkway - 60 with ladder on both ends

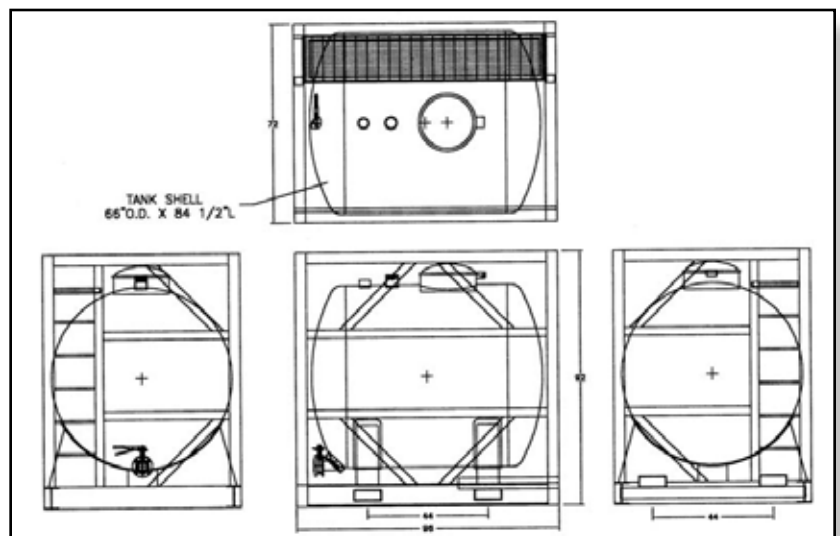

TIGER OFFSHORE RENTALS | FLUID TRANSPORT TANKS