


# 25 BBL SS LOW PROFILE DNV VERTICAL TANK

## COMMON USES

This 25 Barrel Stainless Steel DNV 2.7-1 Approved Vertical Tank is built for safely moving hazardous fluids offshore. It is designed for drilling, completion, production, P&A and work over fluids that are compatible with 316 stainless steel. This package is dependable and versatile for the Offshore E&P Industry. The Tiger 25 BBL SS Low Profile DNV Vertical Tank is designed for offshore dynamic lifting in accordance with the provisions of DNV 2.7-1, EN 12079, API RP 2A and SEPco document OPS0055.

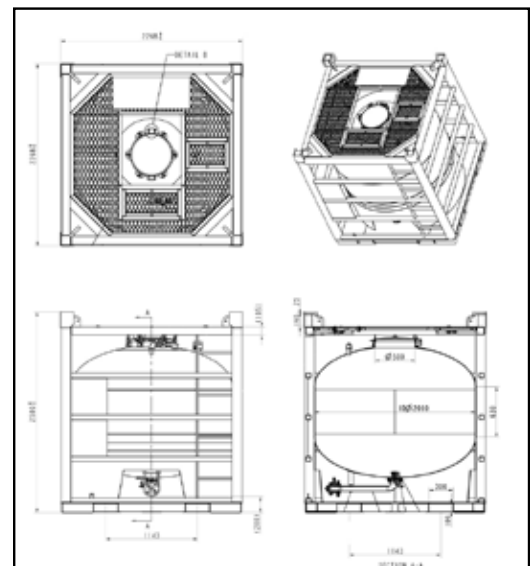

## SPECIFICATIONS

- \* Dimensions
  - o Length: 2268 (0, -5) mm = 89"
  - o Width: 2268 (0, -5) mm = 89"
  - o Height: 2500 (0, -5) mm = 98"
- \* Tank Inner Diameter:  $\varnothing$  2000 mm = 78.75"
- \* Manhole Diameter:  $\varnothing$  500 mm = 19.69"
- \* Nominal Capacity: 4000 L = 1,056 gal. = 25.16 bbls.
- \* Tare Weight: 2400 Kg (5,291 #)
- \* Max Payload: 7600 Kg (16,755 #)
- \* Max Gross Weight (Sling Not): 10000 Kg (22,046 #)

- \* Design Pressure: 2.67 bar = 38.7 PSI
- \* Test Pressure: 4.0 bar = 58 PSI
- \* Tank Material: Stainless Steel 316L (Hot Rolling)
- \* Seal Gasket: FKM (A Kind of Flourine Rubber)
- \* Finish:
  - o Tank: ASTM 240 No. 1 Surface
  - o Frame: Painted With Color RAL 5002
- \* Design Code: DNV2.7-1 IMDG, ASME VIII Div. 1
- \* 3rd Party Approval: DNV2.7-1 IMDG



**TIGER OFFSHORE RENTALS** | FLUID TRANSPORT TANKS