
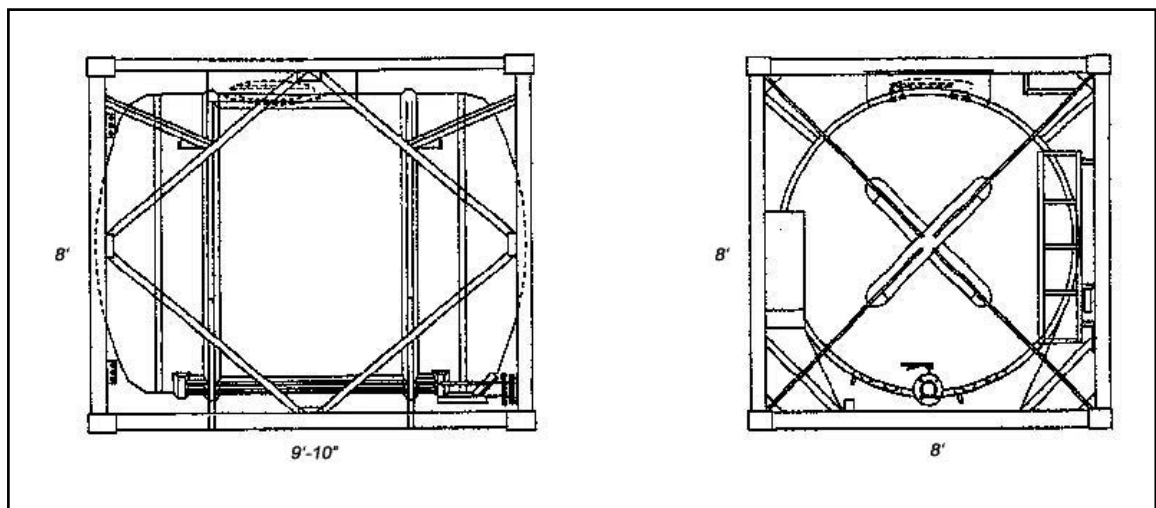


# 50 BBL STAINLESS STEEL ISO TANK

ASME VIII Division I 316 Stainless steel mini tank container. External finish is zinc rich primer with an acrylic top coat and the internal finish is cold rolled ASTM 2B acid cleaned. Options include: insulation, adaptor frames, and bolting two units together. CSC, RID/ADR, IMO, IM 101, (US) DOT, TIR, UIC, (UK) DOT, DNV 2.7-1 Optional Approved.

## SPECIFICATIONS

- \* Dimensions: 9' 10" long x 8' wide x 8' tall
- \* Capacity: 2,000 GAL.
- \* Barrel/Head Thickness: .175/.210"
- \* Pressures: Working = 58 PSI, Test = 87 PSI, Vacuum = 5.9 PSI
- \* Design Temp: 110° C
- \* Tare weight: 4,530 LBS.
- \* Max Payload: 25,949 LBS.
- \* Max Gross weight: 30,479 LBS.
- \* Fittings: Manlid = Fort Vale 500 mm, fully hinged with 6 fixings Air Line = 2" Fort Vale stainless steel butterfly valve with a 1" BSP termination Bottom Outlet = 3" 45° stainless steel foot valve, butterfly valve with a 3" BSP termination. Remote closure system fitted Top Outlet = Optional Safety Relief Valve = 1" -2" BSP high flow pressure/vacuum valve set a 63.8 PSI/3 PSI. Flame trap fitted
- \* Steam Heating System: 4 of 4" vee sections 58 PSI working pressure with 1" BSP inlet/outlet connections

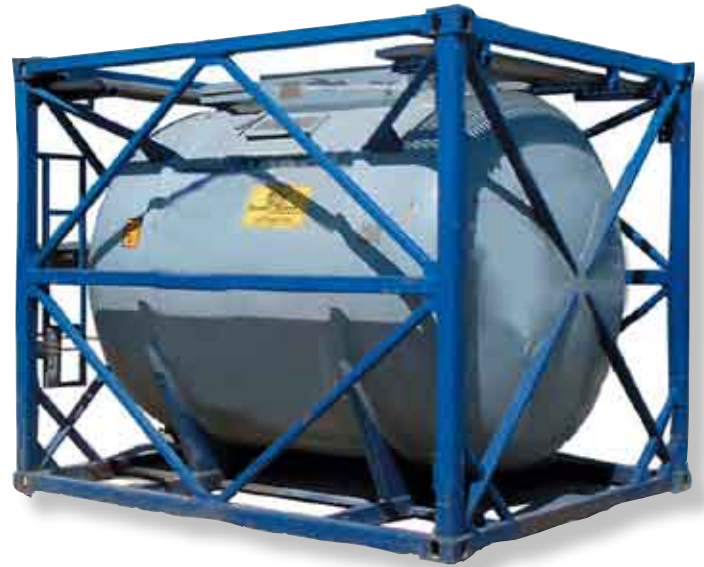

**TIGER OFFSHORE RENTALS** | FLUID TRANSPORT TANKS