


500 BBL COAST GUARD CERTIFIED INDEPENDENT CARGO TRANSPORT TANKS

The Tiger 500 BBL Coast Guard Certified Independent Cargo Transport Tank is designed for offshore dynamic lifting in accordance with the provisions of API RP 2A and SEPco document OPS0055.

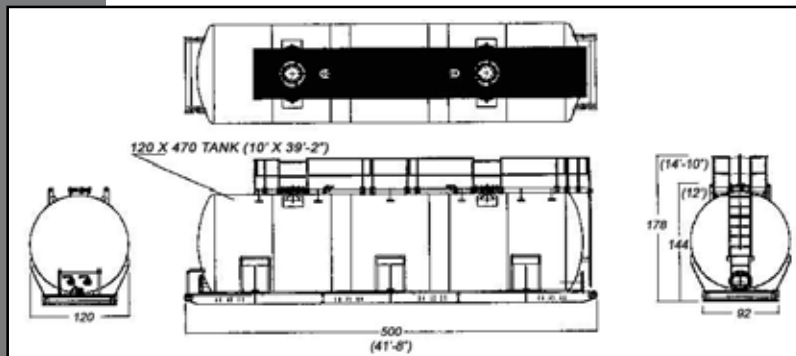

SPECIFICATIONS

- * Designed and constructed in accordance with Marine Safety Manual, Chapter 11, Section F, Carriage of Combustible and Flammable Cargo, Independent Tanks. Maximum working pressure 18 PSIP. (PSIG)
- * Tare weight: 37,000 LBS.
- * Max gross weight 500,000 LBS.
- * Safe working load weight 463,000 LBS. (lift empty only)
- * 1-4" suction/drain line w/4" butterfly valve w/ male camlock and cap
- * 1-4" offset circulation line w/ 4" butterfly valve w/female camlock and plug
- * 1-4" fill line w/4" butterfly valve w/ female camlock and plug
- * 2-3" atmospheric vents
- * 8-skid mounted weld downs
 - * 2-20" manway w/ladders
 - * 1-30" cleanout/cleanout
- * Full length walkway
- * 2-equally spaced baffles
- * Three part poly exterior coating
- * High build chemical resistant liner
- * Dimensions: 8' 6" wide x 41' 8" long x 12' with hand rails down, x 14' 10" with hand rail up



TIGER OFFSHORE RENTALS | FLUID TRANSPORT TANKS